


**Alloy Change Notice!** In most cases our new HARD alloy will be 6005-T5. During inventory rollover, 6061-T6 may be substituted.

**Rectangular Tubes - 24ft. Lengths**

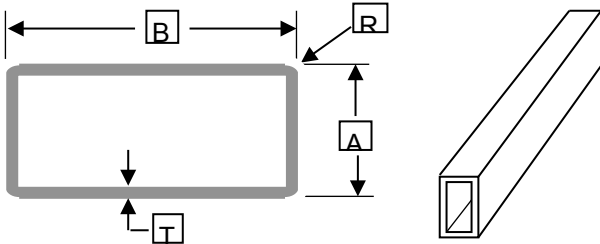

Part #	A	B	T	R	Lbs./Ft.	ALLOY &
						TEMPER
100241	.746	1.595	.125	*	.626	6063-T52
100488	1	1.5	.125	.060	.675	6005-T5
100135	1	2	.125	.060	.825	6005-T5
100026	1	2.5	.065	.125	.514	6005-T5
100064	1	3	.125	.25	1.076	6005-T5
100027	1.125	1.625	.125	.187	.718	6005-T5
100262	1.125	1.625	.125	.187	.718	6063-T52
100141	1.125	1.75	.120	.125	.743	6005-T5
100145	1.437	1.937	.125	.125	.937	6005-T5
100136	1.437	1.937	.188	.125	1.334	6005-T5
100029	1.5	2	.125	.125	.96	6005-T5
100358	1.5	3	.125	*	1.275	6063-T5
100030	1.5	3.5	.125	.125	1.41	6005-T5
100031	1.75	2.25	.125	.125	1.13	6005-T5
100032	1.75	4	.125	*	1.65	6005-T5
100247	2	3	.125	.125	1.425	6005-T5
100033	2	4	.125	.125	1.71	6005-T5
100529	2	4	.188	.125	2.515	6005-T5
100088	2	4	.25	.125	3.284	6005-T5
100034	2	4.5	.187	*	2.75	6005-T5
100130	2	5	.125	*	2.026	6005-T5
100485	2	6	.125	*	2.325	6005-T5
100536	2.065	2.563	.125	.125	1.297	6005-T5
100181	3	6	.125	*	2.626	6005-T5
100188	4	6	.25	*	5.701	6005-T5

\*Radius Sharp - less than .060

Other Alloys & Sizes Available / Call For Info