


**Alloy Change Notice!** In most cases our new HARD alloy will be 6005-T5. During inventory rollover, 6061-T6 may be substituted.

**U Channels - 24ft. Lengths**

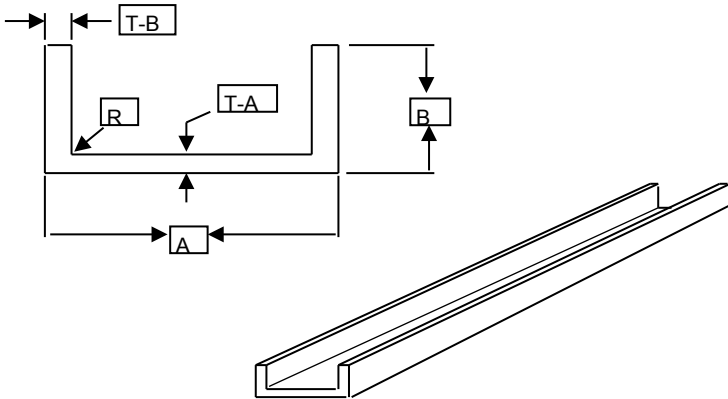

							ALLOY & TEMPER
Part #	A	T-A	B	T-B	R	Lbs./Ft.	
100219	.75	.125	.75	.125	*	.300	6005-T5
100126	1	.125	.5	.125	*	.262	6005-T5
100304	1	.125	1	.125	*	.402	6005-T5
100010	1.25	.188	.75	.188	*	.536	6005-T5
100011	1.5	.125	1	.125	*	.487	6005-T5
100302	2	.125	1	.125	*	.563	6005-T5
100012	2	.156	1.5	.156	*	.877	6005-T5
100013	3	.13	1.5	.2	.25	1.135	6005-T5
100014	4	.15	2	.23	.25	1.773	6005-T5
100089	4	.19	2.25	.29	.25	2.378	6005-T5
100015	5	.15	2.25	.26	.3	2.257	6005-T5
101021	6	.17	2.5	.29	*	2.834	6061-T6

\*Sharp Radius-less than .060

or Alloys & Sizes Available / Call For Info

5/11/09