


Alloy Change Notice! In most cases our new HARD alloy will be 6005-T5. During inventory rollover, 6061-T6 may be substituted.

Round Tube - 20ft. Lengths

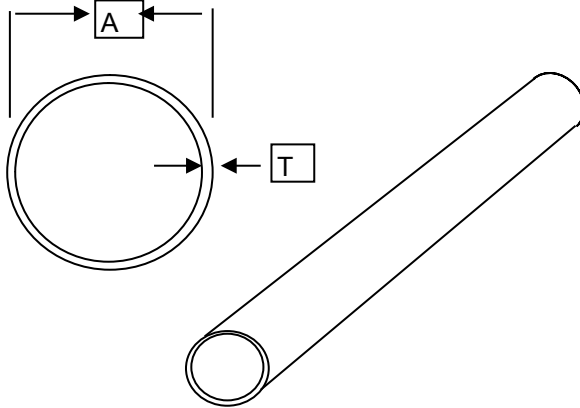

Part #	A	T	Lbs./Ft.	ALLOY &	I.D.
				TEMPER	
100065	.5	.065	.107	6005-T5	.370
100206	.72	.049	.124	6063-T6	.622
100507	.72	.065	.161	6063-T52	.590
100332	.75	.049	.127	6063-T6	.652
100193	.75	.065	.168	6063-T52	.62
100323	.875	.049	.152	6063-T52	.777
100107	.875	.058	.179	6063-T6	.759
100092	.875	.058	.179	6063-T52	.759
100068	1	.050	.179	6005-T5	.900
100572	1	.065	.229	6063-T52	.870
100183	1	.080	.277	6005-T5	.840
100239	1	.125	.413	6063-T52	.750
100587	1.25	.125	.530	6063-T52	1.000
101023	1.5	.090	.479	6063-T52	1.32
100069	1.5	.125	.648	6005-T5	1.250
100070	2	.125	.883	6005-T5	1.750
100071	2.5	.188	1.634	6005-T5	2.124
100603	3	.125	1.332	6005-T5	2.75

Other Alloys & Sizes Available / Call For Info